




MAXIGRAB®

PLATE GRABS

A range of steel plate grabs with built-in safety features and long lasting durability for industrial applications. Lift, lower and position with complete safety.

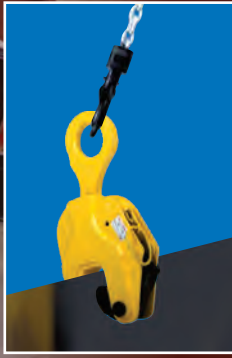

VERTICAL

- Quick Release Pull Ring
- Spring Loaded Grab Tooth

- Maxigrab Vertical Plate Grabs are suitable for the vertical lifting of plate steel up to 50mm thick
- Grabs are equipped with a safety mechanism, ensuring the grab does not slip when the lifting force is applied and when the load is being lowered
- Spring-loaded tightening lock mechanism ensures a positive initial clamping force
- Serrated grab teeth
- Minimum WLL is 10% of the maximum WLL
- Spares available on request

Working Load Limit (Kg)	Jaw Opening (mm)	Eye Diameter (mm)	Net Weight (Kg)
1000	0 - 22	48	4
2000	0 - 30	57	6
3000	0 - 35	59	9
5000	5 - 45	64	17
8000	5 - 55	64	26



HORIZONTAL

- Maxigrab Horizontal Plate Grabs are suitable for secure lifting of plate steel up to 80mm thick in a horizontal position
- Serrated grab teeth
- Used in pairs
- Spares available on request

Working Load Limit Per Pair (Kg)	Jaw Opening (mm)	Eye Diameter (mm)	Net Weight Per Pair (Kg)
1500	0 - 25	25	6
3000	0 - 30	30	8
4000	0 - 45	40	12
5000	0 - 50	29	15
8000	0 - 85	50	45



UNIVERSAL

- Maxigrab Universal Plate Grabs are suitable for secure bi-directional lifting of plate steel up to 45mm thick
- Articulated lifting shackle
- Equipped with a pre-tension mechanism ensuring the grab does not slip when the lifting force is applied and when the load is being lowered
- Serrated grab teeth
- Minimum WLL is 10% of the maximum WLL
- Spares available on request

Working Load Limit (Kg)	Jaw Opening (mm)	Eye Diameter (mm)	Net Weight (Kg)
1000	0 - 20	48	4
2000	0 - 25	67	7
3000	0 - 30	74	15
5000	0 - 50	80	21
8000	0 - 45	84	37

MAXICLAMP®

BEAM CLAMPS



Item Code	Working Load Limit (kg)	Adjustable Beam Width (mm)	Net Weight (Kg)
MC01	1000	75-220	4.5
MC02	2000	75-220	5.0
MC03	3000	80-320	10.5
MC05	5000	80-320	11.0
MC10	10000	90-320	16.0